

**GRO**  
**Global Racing Oil®**



**MOTORBIKE CATALOGUE**

# INDEX

3-6

## MOTO 4T

FACTORY RACING      SMART SCOOTER      SPIRIT

7-10

## MOTO 2T

PERFORMANCE 2T      SYNT 10      SCOOTER OIL  
KART 2      MIX 3      MOPED OIL

11-18

## MOTO CARE

ULTRA 5      CHAIN LUBE DRY      AIR REPAIR GTS 30      GLOBAL WASH SHAMPOO  
BRAKE FLUID DOT 4      CONTACT CLEANER      ANTICONGELANTE      GLOBAL LIMPIAMOTORES  
BRAKE FLUID DOT 5.1      MULTISPRAY PTFE      FILTER CLEANER      GLOBAL GEL  
FORK FLUID      MULTILUBE      FOAM FILTER SPRAY      GLOBAL WHITE TF2  
CHAIN LUBE      SILICON PLUS      FOAM FILTER OIL

19-21

## MOTO GEAR BOX

GEAR EXTREM  
GEAR TRANS

22

## GARDENING

UNIVERSAL 4T      MOTOSIERRAS  
UNIVERSAL 2T



**DAVOL**  
TECNOLOGIC

At Davol Tecnologic, a company with more than 20 years of experience dedicated to fine tuning racing motorcycle engines of the World Championship of speed, enduro, motocross, supermotard and raids, we always use the products of the GRO Moto range as part of our professional guarantee

We have proven that using lubricants from the GRO Moto range, our engines benefit from less wear compared to other lubricants.

Therefore, do not hesitate, to extend the life of your engine and maintain high performance, GRO Moto is your best choice.



# MOTO 4T

# 4T



# HIGH PERFORMANCE AND DURABILITY





## FACTORY

0W30 / 10W60

JASO MA2 - API SN

**100% Synthetic engine lube special competition**

Lubricant formulated with exclusive 100% synthetic high performance bases. New range even more focused on the demanding requirements of the competition.

1L

4L

50L

200L

## RACING

5W40 / 10W30 / 10W50

JASO MA2 - API SN

**100% Synthetic engine lube special competition**

High performance fully synthetic lubricant, which offers maximum efficiency and protection. Formulated with the finest and exclusive synthetic bases, outperforming the requirements of high performance 4T motors operating at maximum RPM.

1L

4L

50L

200L

1000L





**SMART**

**10W40 / 15W50**

**JASO MA 2 - API SN / JASO MA 2 - API SN**

**Synthetic motor lubricant**

High performance synthetic lubricant, which offers maximum efficiency and protection. Designed for 4 stroke motors, meeting the requirements of manufacturers producing air and liquid cooled engines.

**1L**

**4L**

**50L**

**200L**

**1000L**

**SCOOTER**

**0W30 / 5W40**

**API SN**

**100% synthetic lube special 4T scooter**

High performance 100% synthetic lubricant, recommended for motorcycle 4T scooter suitable for use on the road as in urban roads. Formulated for all kinds of situations and climatology. Satisfies engine specifications of the Piaggio group.

**1L**

**50L**

**200L**





## SCOOTER

10W40

API SL

### Synthetic lube special 4T scooter

Synthetic, high-performance lubricant SAE 10W40, recommended for 4 stroke scooters, suitable for highway and city use. Formulated for all types of situations and climatology.

1L

50L

200L

1000L

## SPIRIT

20W50

JASO MA2 - API SN

### High performance multigrade lube

Lubricant formulated to offer maximum efficiency and protection. Designed for 4 stroke motors, meeting the requirements of manufacturers producing air and liquid cooled engines.

1L

4L

50L

200L



# MOTO 2T



**MAXIMUM POWER  
FOR YOUR ENGINE**





## PERFORMANCE 2T

JASO FD / API TC + / ISO L-EGD

**100% synthetic lube special racing premix**

Full synthetic lubricant for 2 stroke competition motors. The sophisticated dispersing chemical system assures the elimination of residues and a better combustion. Its strong adherence properties assure perfect lubrication of the revolutionized components.

1L

## KART 2

JASO FD / API TC + / ISO L-EGD

**100% synthetic lube special racing premix**

Full synthetic high performance oil for 2 stroke engines. Contains Castor oil. Recommended for all 2-stroke kart engines (Parilla, RKD, Rotax) working efficiently under very demanding conditions and high rpm.

1L







## SYNT 10

JASO FD / API TC + / ISO L-EGD

### 100% Synthetic lube special premix and injection

100% Synthetic high performance oil for 2-stroke engines. Special aditivation provides ultrahigh film strength, reduces friction, low smoke emission and formation or carbon residues, increases spark plugs life and motor efficiency.

1L

50L

1000L

## MIX 3

JASO FC / API TC

### Synthetic lube special premix and injection

New formula developed for the new generation of small and medium-engined motorcycles. Premix system or separated tank. Low smoke emission and formation of carbon residues, increases spark plugs life.

1L

1000L





## SCOOTER OIL / MOPED OIL

JASO FC / API TC

### Synthetic lube special premix and injection

New formula developed for the generation of scooters and small and medium engined urban motorcycles. Premix system or separated tank. Low smoke emission and formation of carbon residues, increases spark plugs life.

125CC

1L

50L

200L



# MOTO CARE

## BEST SENSATIONS TO DISCOVER





## ULTRA 5

### Mineral brake and clutch fluid

High performance mineral fluid with paraffinic bases for the clutch circuit of motorbikes. It is highly compatible with seals preventing deformation leading to the possibility of leakage.

500 ML

## BRAKE FLUID DOT 4 - DOT 5.1

### Synthetic brake fluid

Synthetic fluid for brake systems (disk or drum) and clutch commanders. It is specially recommended for its high boiling point, for motorcycles.

500ML





## FORK FLUID

2,5W / 5W / 7,5W / 10W / 15W / 20W

KAYABA / SHOWA / OHLINS / MARZOCCHI / PAIOLI / WP

### Fork fluid

Synthetic fork fluid specially designed to meet the requirements of the modern suspension systems. Its exclusive additive structure provides effective seal protection, extending service life and reducing leakage.

1L

## CHAIN LUBE

## CHAIN LUBE DRY

### Chain lube dry

Highly adhesive lubricant with high penetrative power, specially formulated for motorcycle chains with or without o-rings. Highly resistant to centrifugal forces, water and high temperatures.

200ML 500ML





## CONTACT CLEANER

### Degreaser brake cleaner

High pressure spray formulated not to leave a residue. It degreases and cleans carbonous deposits, contacts, spark plugs, carburetors, disc and drum brakes and internal components of the engine.

500ML

## MULTISPRAY PTFE

### Multipurpose lubricant

Multipurpose lubricating aerosol with PTFE which provides a very low friction coefficient. Excelent penetration and anti-oxidation capacity.

500ML

## MULTILUBE

### Anti-lock lubricant

Rust dissolving oil, high ability to penetrate and lubricate. Protects against humidity, frees up locked components and lubricates small mechanisms. Once applied, leave to act for a few minutes.

500ML





## **SILICON PLUS**

### **Shine spray**

Enhances the shine and refreshes the colour of fairings, plastics, control panels, rims, mudguards, vinyl and motorcycle dashboards. Prevents dust and insects deposits. Repels water and damp. Apply from a distance of 30 cm.

**500ML**

## **AIR REPAIR GTS 30**

### **Flat tire fix**

The indispensable spray in case of a flat, without having to remove the tire. It allows repairing a flat and continuing to travel to the nearest service point.

**200ML**





## GCC

10% - 30% - 50% - PURE

### Antifreeze fluid

High-performance anti-freeze liquid for all kinds of cooling circuits. Year-round use, prepared to withstand temperatures of  $-4^{\circ}\text{C}$ ,  $-18^{\circ}\text{C}$ ,  $-35^{\circ}\text{C}$ , with a boiling point of  $127^{\circ}\text{C}$ . Manufactured according to UNE 26361-88. Contains an anti-foaming agent, an anti-rust agent and a corrosion inhibitor for metals. Contains ethylene glycol.

1L

5L

25L

200L

1000L

## FILTER CLEANER

### Filter cleaner

Filter cleaner is specially formulated for all types of foam air filters, because of its non-aggressive nature on the foam and rubber of a filter. It eliminates oil residue, mud and soil, thereby improving filtration and leaving the porous layer of the filter unharmed. Once a filter is clean and dry, the use of FOAM FILTER OIL is recommended.

5L







## FOAM FILTER SPRAY

## FOAM FILTER OIL

### Foam filter oil

Protects the filter from water, dust, grit and dirt. Soak new filters well and then drain. To maintain used filters, thoroughly clean off the dirt with solvent, leave to dry completely and then apply Foam Filter.

500ML

1L

## GLOBAL WASH SHAMPOO

### Bike detergent

Liquid detergent which can be applied directly and removes easily any type of dirt from all the parts of the vehicle, including resistant dirt (grease, mud). Dilution not necessary.

1L

5L

## GLOBAL LIMPIAMOTORES

### Degreaser

Safety solvent degreaser with great power for cleaning engines and parts as a substitute for other solvents such as gasoline, oil, solvents... high penetration and fast drying. Use pure or diluted 50%.

50L

200L





## GLOBAL GEL

### Hand soap

Hand cream with energetic degreaser micro particles. With emulsifiers and emollients components that provide high cleaning power, leaving hands soft. PH neutral.

1KG

10KG

## GLOBAL WHITE TF2

### Multipurpose grease

Long lasting multifunctional complex grease. Suitable to lubricate any point in contact with water, salt water or steam, high adhesive strength provides a tight seal and lubrication.

200GR



# MOTO GEAR BOX



## UNLIMITED RESISTANCE





## GEAR EXTREM

75W

API GL 5

### Gearbox lube

100% synthetic racing lubricant for transmissions. Low viscosity for maximum lubrication under the most severe use. Specially designed for racing gear boxes. Trials/Cross Country/Cross/Road Racing.

1L

## GEAR TRANS

10W40

API GL 4

### Gearbox lube

High performance synthetic lubricant for gearboxes with wet clutch. With special additives to obtain a low viscosity and resistance at high temperatures to ensure a clutch and gear shifting smooth and precise.

1L

50L

1000L



**GEAR TRANS****80W90****API GL 5****Transmission lube**

High performance lubricant specifically formulated for cardan and helicoidal transmissions. It is formulated with extreme pressure additives which absorb the heavy loads that are very common in the transmission components during the acceleration and deceleration processes. This means a more effective power transmission and a longer gear life.

**1L****GEAR TRANS****85W140****API GL 5****Transmission lube**

High performance lubricant specifically formulated for cardan and helicoidal transmissions. It is formulated with extreme pressure additives which absorb the heavy loads that are very common in the transmission components during the acceleration and deceleration processes. This means a more effective power transmission and a longer gear life.

**150cc****1L**



## UNIVERSAL 4T

15W40

API SG

### High performance mineral lube

Multigrade oil for all kind of 4 stroke engines.

High thermal stability avoiding residue and sludge formation, powerful detergent and dispersant properties. Excellent antioxidant, antirust and antifoaming properties.

1L

5L

200L

## UNIVERSAL 2T

JASO FC / API TC

### High performance mineral lube

Lubricant formulated for 2-stroke engines, premix system or separated tank, that offers an exceptionally resistive film and engine protection. Mopeds, chain saws, garden machinery, power units and generators.

1L

5L

## MOTOSIERRAS

SAE 30

### Chain saw lube

Paraffin based and neutral lubricant with high viscosity which gives a high tack suitable for chain saw lubrication, high anti-wear properties.

5L

20L

200L

1000L





## INFORMATION ON STANDARDS AND SPECIFICATIONS

### ISO International Organization of Standardization

**ISO-L-EGB** Equivalent to **JASO FB**  
**ISO-L-EGC** Equivalent to **JASO FC**  
**ISO-L-EGD** Higher than **JASO-FC**

### JASO Japanese Automotive Standards

**JASO T904-48** wet clutch friction test and JASO M345 engine de 2T.  
**JASO MA/MA2** 4 Strokes engines with maximum anti-friction wet clutch performance.  
**JASO MB** 4 Strokes Engines with low anti-friction wet clutch performance.  
**JASO FA** 2 Strokes engines with low performance.  
**JASO FC** 2 Strokes engines with medium performance.  
**JASO FC** 2 Strokes engines with high performance and low smoke emanation.  
**JASO FD** 2 Strokes engines with high performance, low smoke emanation and a greater detergent requirement.

### VISCOSITY GRADE

Is the property that allows the lubricant to ensure protection and engine performance in a temperature range. This is determined by SAE rules.

### COLD GRADE or HOT GRADE

The lower value of COLD GRADE, the lubricant more fluid at low or negative temperatures.

### WARM GRADE or SUMMER GRADE

The higher the value of WARM GRADE, lubricant maintains over its a viscosity at high temperatures.

### SAE Society of Automotive Engineers

**SAE J 300** Engine Oils.  
**SAE J 306** Gear Oils.


### API American Petroleum Institute

**API S** Gasoline Engines.  
**API C** Diesel Engines.  
**API T** 2T Gasoline Engines Moto, Karting, Marine...  
**API TA** Moped.  
**API TB** Scooter and Motorcycle.  
**API TC** High performance engines.  
**API TD** Marine engines (TCW 2 / TCW3)

Product benefit are defined by a letter (&) and a number in ascending order of benefit.

**API** rules for Gear oil.

**API GL-4** Multipurpose Gear oil.  
**API GL-5** High performance Gear oil.

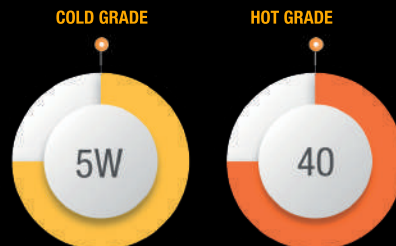



**C/ Comerç, 36**  
**Polígon industrial Can Sunyer**  
**08740 Sant Andreu de la Barca (Barcelona) - España**  
**Tel. +34 936 821 514**  
**[info@globalracingoil.com](mailto:info@globalracingoil.com)**  
**[www.globalracingoil.com](http://www.globalracingoil.com)**

